


BRTNN11WSS3P technical specifications

Power source (KVA)	Power Supply (V)	Recommended IMM (T)	Traverser Stroke	Traverser Stroke (mm)	Crosswise Stroke (mm)	Vertical Stroke (mm)	Stand-by station (mm)	Max loading (Kg)	Cycle time (s)	Dry take out time(s)	Arm model	Model of EOAT	Angel	Working air pressure (MPa)	Air consumption (N-1/cycle)	Positioning accuracy (mm)	Complete machine size (mm)	Net weight (Kg)
3.2	220	250T-480T	AC servo motor	1700	700	1100	181	10	6.15	1.63	Single arm and telescopic type	Two suction Two fixtures	90°	0.5-0.6	3.2	±0.05	2510*1200*1485	305
transverse				Crosswise					Obverse arm					Deputy arm				
Transverse electrical machines	Reducer	Slide rail	Gear rack / Belt	Electrical machines	Reducer	Slide rail	Gear rack / Belt	air cylinder	Electrical machines	Reducer	Slide rail	Gear rack / Belt	Air cylinder	electrical machines	Reducer	Slide rail	Gear rack / Belt	Air cylinder
1000W	750W 1: 9	25mm	Belt : 25	750W	750W 1:5	20mm	Gear rack: 20	\	1000W	750W 1: 9	20mm 25mm	20mm 30mm	\	\	\	\	\	\

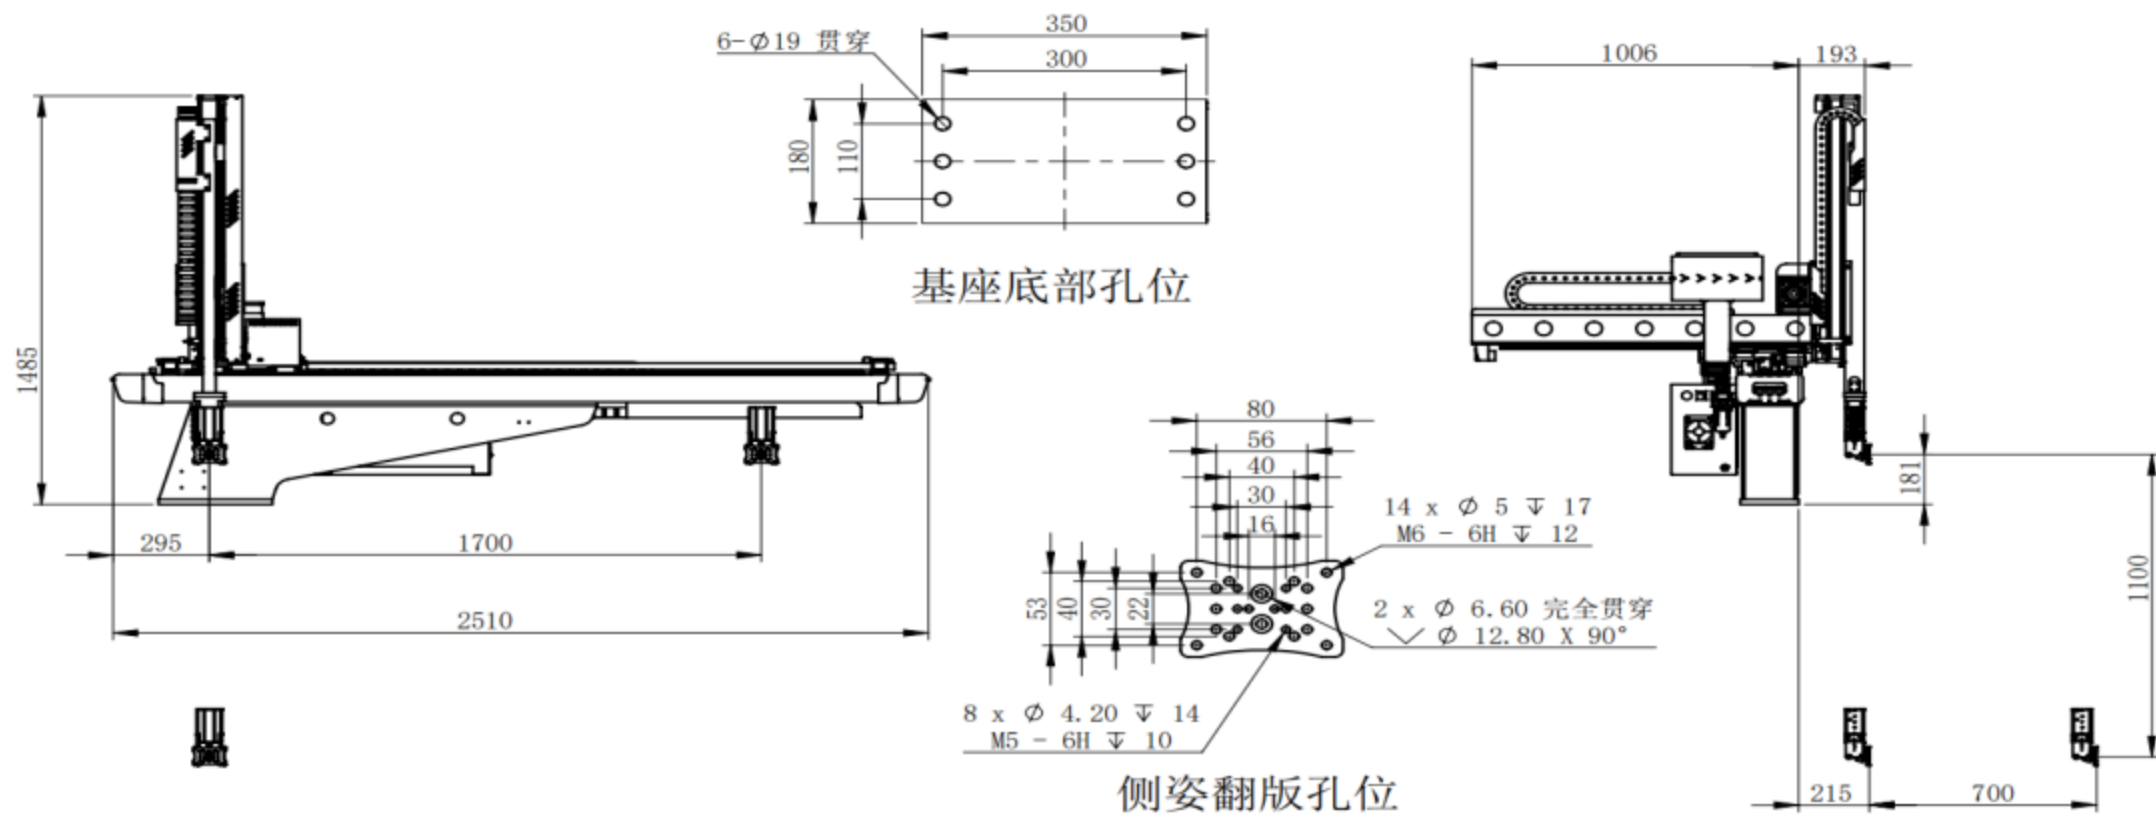

No further notice if the specification and appearance are changed due to improvement and other reasons. Thank you for your understanding.